

產品型號: PL9323



PL9323 產品樣式



雙通道



單通道




不銹鋼擋板

功能與特點

- 1、 Reasonable and reliable design, low noise, smooth operation and long service life;
- 2、 With function of opening doors automatically under power-off state to meet the need of fire-fighting passage;
- 3、 With functions of anti-tail, anti-reverse pass and so on;
- 4、 Card can be set "with memory" or "without memory" functions;
- 5、 With automatic reset function, i.e. after having access to the gate, the gate automatically restores to the locked state if not pass within the time set;
- 6、 With infrared anti-clip function (anti-clip when gate is open or running);
- 7、 Compatible with IC, ID card, scanning and face recognition,etc.
- 8、 Two modes of operation are available: open or closed.
- 9、 Various working modes are available, including two-way card reading and one-way card reading,etc.

外型尺寸

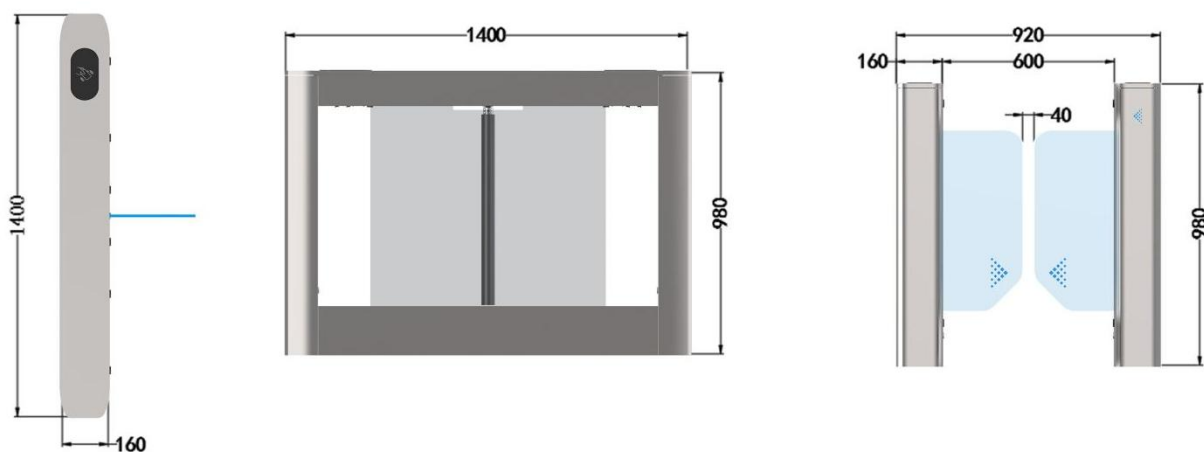

規格

尺寸 (長*寬*高)	1400*160*980mm
機身材質	頂蓋 1.2mm+機身 0.9mm 304 拉絲板
擋板材質	10mm 透明丙烯酸纖維
通行寬度	600-900mm
擋板攔截高度	820mm
擋板距地面高度	200mm
移動方式	無刷迴轉煞車一體成型
電源	24V 150W
輸入電壓	AC100V~240V,50/60Hz
驅動馬達	DC 無刷馬達 90K 30W
通關速率	開放模式 50人/分鐘 ; 管制模式35人/分鐘
開合速度	可調節從 0.5秒 至 1.5秒
指示燈	三色燈板+三色燈條
控制方式	1V2無刷簡化板+電控箱+網板箱
噪音	≤65dB
工作溫度	-20°C~+70°C
環境濕度	≤90% 無凝結
保護等級	IP4X
適用環境	室內、室外 (室外有雨棚)

產品型號: PLD9323

實際案例

