

BLUEnet Gateway

The SALTO Gateway is the link between the PC and the wireless network.


Completely managed through SALTO ProAccess SPACE software, it collects all the information sent by the escutcheons through the nodes.



Technical characteristics

- **Frequency range: 2400-2483,5 Mhz.**
- **RF standard: Bluetooth® (Bluetooth®).**
- **Indoor radio range: 10/15m.**
- **Max output power: 8dBm.**
- **AES 128 bit encryption.**
- **Connection to the LAN Network 10 BASE-T/100 BASE-TX.**
- **PoE supported IEEE802.3af (12V power adapter optional).**
- **Can manage several nodes and many locks.**
- **IP addressing through web explorer available.**
- **Firmware update via software through Ethernet connection.**
- **One internal node included.**


Technical drawing

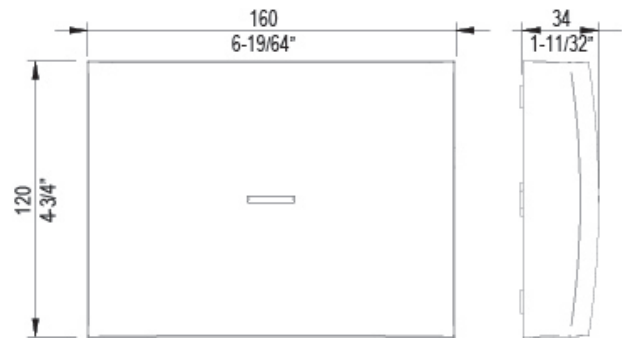

Reader finish




Technology platforms



Wireless technologies



Certifications

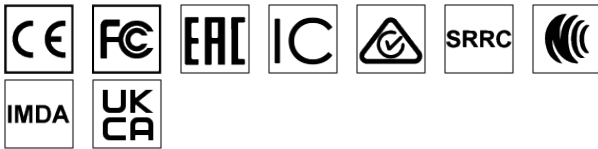

Disclaimer:

For a complete description of the product range, verification of the availability and technical feasibility of the selected product, and a commercial offer, please get in touch with the local authorized SALTO dealer or a SALTO office.

SALTO Systems reserves the right to modify the product and its components.

Technical information and images displayed on the SALTO Systems product page are for informative purposes only and designed to inform about the main product features, options and technical specifications. Therefore, all images, illustrations, shapes, features, specifications, sizes, data, descriptions and colours shown on the SALTO Systems page shall consider as no-binding approximate indications only.